## P17G SEPARATOR SUPPLIED FROM A CURRENT LOOP

#### Features:




Input:




For the separation of measuring signals (eg in PLC).

- Thin casing 6.2 mm.
- Standard d.c. current output signal 0/4 20 mA.
- Does not require an auxiliary supply voltage.

### **Example Of Application**

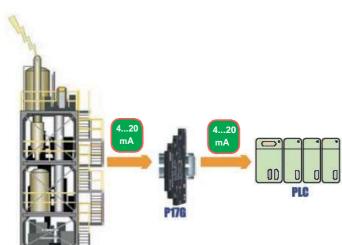

### Galvanic separation (protection of PLC controller inputs).

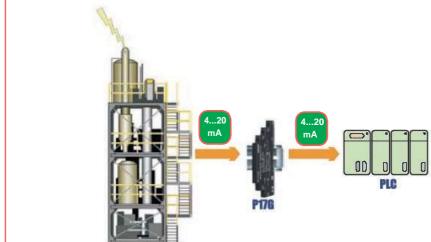

### Outputs:









Inputs				
Input type	Range	Overload	Error	
Current 020 mA	0 20 mA	Maximal input current 40 mA	Conversion error: +/- 0.2 % Additional errors: - from load resistance	
	4 20 mA		changes -0.15 %/ 100 W - from ambient temperature changes: -0.05 %/ 10°C	

Outputs			
Output type	Admissible load resistance	Pulsations	
Current 0 20 mA, (420 mA)	R <sub>load</sub> < 500 W	<b>-</b> 10 mV	

External features			
Overall dimensions	6.2 x 77.5 x 100 mm		
Weight	80 g		
Protection grade	ensured by the casing: IP50	from terminal side: IP20	
Fixing	on a 35 mm DIN rail	acc. to EN 60715	

Rated operating conditions			
Temperature	ambient: -20 <u>23</u> 65°C	storage:-4085°C	
Humidity	< 95%	inadmissible condensation	
Operating position	any		



# P17G SEPARATOR SUPPLIED FROM A CURRENT LOOP

Safety and compatibility requirements		
Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Isolation between circuits	basic	
Pollution level	2	
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth operating	50 V	
voltage	30 V	

#### Installation


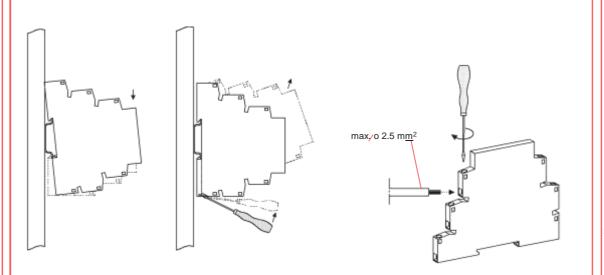


Fig.1. Way of assembling/disassembling on the rail.

Fig.2. Way of wire fixing.

#### Connection diagram

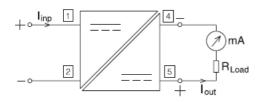

#### **Ordering**

P	17G	XX	Χ
Version:			
standard		00	
as per order*		XX	
Acceptance tests:			
without extra quality requirements			8
with an extra quality inspection certificate			7
acc. to customer's request*			Χ

<sup>\*-</sup> after agreeing with the manufacturer

# ORDER EXAMPLE

The code: **P17G-00-8** means:

P17G - passive separator of P17G type, 00 - standard version,

8 - without extra quality requirements.

#### See also:



Programmable separator P20G.



Programmable temperature, resistance, voltage from shunt and standard signals-P20.



Transducer of temperature and standard signals - P30U.